

**DIAMOND PRO STONE CUT<sup>®</sup> AND HIGHLAND STONE<sup>®</sup> WALL SYSTEMS**

For a fresh look, two popular Anchor<sup>™</sup> products can be combined in the Sequent<sup>™</sup> retaining wall system with great aesthetic and functional results. The Sequent panels are a quick way to build a multiple-height wall by combining the Diamond Pro Stone Cut<sup>®</sup> and Highland Stone<sup>®</sup> 6" multipiece retaining wall systems in an installation pattern. These panels break up the horizontal lines of a typical single-height product and can be used with geosynthetic reinforcement or the Anchorplex<sup>™</sup> retaining wall system. For contractors, the Sequent installation pattern is simple to install on a large scale when they want to create a random, rough-textured look without sacrificing stability – ideal for larger projects.



Diamond Pro Stone Cut <sup>®</sup>	Large	Medium	Small
Approximate Dimensions*	8" x 18" x 12"	8" x 11" x 12"	8" x 7" x 12"
Approximate Weight*	77 lbs.	45 lbs.	34 lbs.
Coverage	1.00 sq. ft.	0.61 sq. ft.	0.39 sq. ft.
Setback/System Batter	1"/7.1°	1"/7.1°	1"/7.1°



Highland Stone <sup>®</sup>	Large**	Medium	Small
Approximate Dimensions*	6" x 18" x 12"	6" x 12" x 12"	6" x 6" x 12"
Approximate Weight*	78 lbs.	59 lbs.	30 lbs.
Coverage	0.75 sq. ft.	0.50 sq. ft.	0.25 sq. ft.
Setback/System Batter	1 1/8"/10.6°	1 1/8"/10.6°	1 1/8"/10.6°



Accessory Units	Cap	Corner
Approximate Dimensions*	Front, 4" x 17 1/4" x 10 3/8" Back, 4" x 12" x 10 3/8"	8" x 18" x 9" 8" x 18" x 9"
Approximate Weight*	47 lbs.	101 lbs.
Coverage	1.22 lin. ft.	1.50 sq. ft.

See [anchorwall.com](http://anchorwall.com) for installation instructions.

**No pins. No mortar.  
No misalignments.**

Rear-lip locator, invented by Anchor, makes installation fast and accurate. Anchor – the original rear-lip product!



\*Product dimensions are height by face length by depth. Actual dimensions and weights may vary from these approximate values due to variations in manufacturing processes. Specifications may change without notice. See your Anchor representative for details, color options, block dimensions and additional information.  
\*\*Large unit features a partial core.

**DIAMOND PRO STONE CUT® AND HIGHLAND STONE® WALL SYSTEMS**



The Sequent™ panel system combines the Diamond Pro Stone Cut® and Highland Stone® 6" multipiece retaining wall systems to achieve the more random look of a multiheight wall system.


**Estimating Information**

Each panel covers 3.5 sq. ft.

- 1) Determine the square footage of exposed wall. Divide that number by 3.5 to calculate the number of blocks of each size block of each product.
- 2) Determine the linear feet of base blocks needed. Divide this number by 1.5 to calculate the number of large Highland Stone® blocks needed for the base. If using all three sizes, divide the linear feet by 3 to calculate the number of each size.
- 3) Add the Highland Stone base units to the number of Highland Stone units from step one to determine the total number of blocks needed.

**Installation Pattern**

This installation pattern is one of many possible options. Others can be used for different appearances.

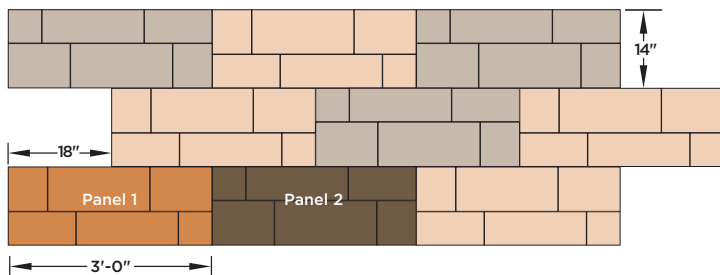


**Installation Guidelines**

Install the base course using best practices. The wall is built with a series of panels in a repeating installation pattern. Install filter fabric behind wall.


Follow these steps to build panels.

**Panel 1**

- 1 Start by using all three units of Highland Stone® product.




- 2 Next, use all three units of Diamond Pro Stone Cut® product and stack them on the first three units, staggering the bond. This completes Panel 1.

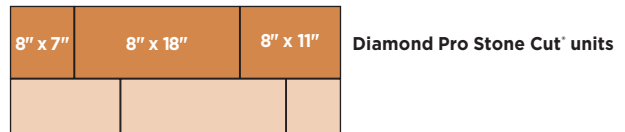


**Panel 2**

- 3 Working along the wall, next use all three units Diamond Pro Stone Cut product.

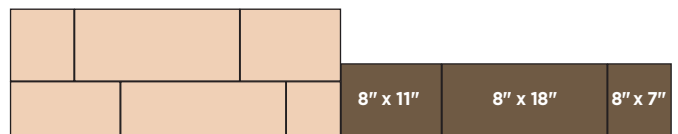

- 4 Next use all three units of Highland Stone product and stack them on the course described in step 3, staggering the bond. This completes Panel 2. Repeat panel installations across the base course.

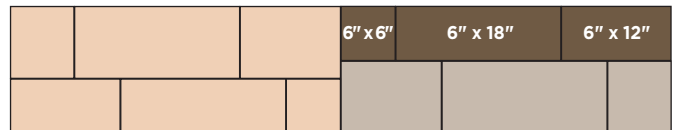

- 5 Backfill, compact and install grid or structural backfill, if needed.

- 6 Start the next set of panels by staggering the first unit 18 inches to the right or left of lower panels and repeat step 1.

Continue to install panels to complete the wall.

© 2011 Anchor Wall Systems, Inc. The Diamond Pro Stone Cut® and Highland Stone® wall systems are manufactured under license from Anchor Wall Systems, Inc. (AWS). The "Anchor A" and "Anchor Build Something Beautiful" logos, "Anchorplex," "Highland Stone," "Diamond Pro Stone Cut" and "Sequent" are trademarks of AWS. The wall system blocks are covered by the AWS Limited Warranty. For a complete copy, visit your local dealer or see anchorwall.com.

Anchor Wall Systems, Inc., 5959 Baker Road, Suite 390, Minnetonka, MN 55345.  
A&B0810

73.31271 09/11 4015