




DEVELOPED BY  
**ANCHOR**  
DIAMOND  
WALL INDUSTRY EXPERTS

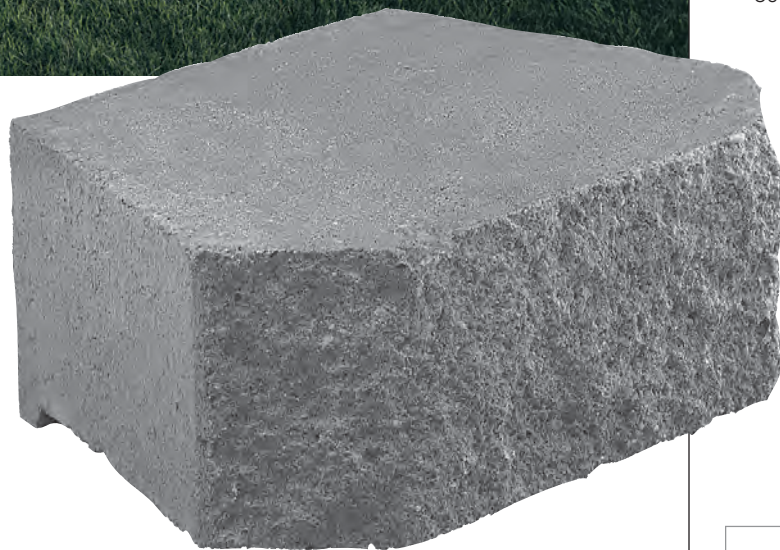

# DIAMOND<sup>®</sup> BEVELED FACE

RETAINING WALL  
BEVELED SPLIT FACE

A BEVEL-CONTOURED RETAINING WALL WITH ENDURING PERFORMANCE.

## ✓ FEATURES & BENEFITS

- ASTM C1372 - compliant; ICC evaluated
- Solid top = no core filling
- Designed primarily for gravity walls, but also suitable for Anchorplex<sup>®</sup> walls and geosynthetic reinforced walls†
- Supported by Anchorwall<sup>®</sup> design software and estimating tools
- Integral locating features establish uniform setback and batter.
- Compatible fittings/accessories

<sup>†</sup>See Installation Guide. Reinforced walls, and other critical walls must be designed by qualified engineers.  
<sup>‡</sup>Dimensions and Weights may differ slightly from manufacturer to manufacturer.  
<sup>§</sup>Gravity wall heights are based on project specific conditions and may be lower than this value.  
<sup>¶</sup>Measured on the top course to the front of the wall.  
<sup>\*\*</sup>Measured on the base course to the front of the wall.

<b>H X W X D<sup>†</sup></b>	<b>6" X 15 7/8" X 12"</b>
<b>WEIGHT<sup>‡</sup></b>	<b>68 LBS.</b>
<b>COVERAGE</b>	<b>0.72 SQ. FT.</b>
<b>SETBACK (PER COURSE); BATTER</b>	<b>1 1/8"; 10.6°</b>
<b>MAX. GRAVITY WALL HT.<sup>§</sup></b>	<b>4 FT. 6 IN.</b>
<b>MIN. OUTSIDE RADIUS<sup>¶</sup></b>	<b>2 FT.</b>
<b>MIN. INSIDE RADIUS<sup>**</sup></b>	<b>4 FT.</b>



**ANCHOR DIAMOND Group**  
5909 Baker Rd. Suite 550  
Minnetonka, MN 55345  
☎ 1-952-933-8855

For more info visit  
[anchordiamond.com](http://anchordiamond.com)

