





DIAMOND PRO PS

RETAINING WALL SYSTEM STONE CUT VIRTUAL JOINT

A RICH FACETED APPEARANCE
 NOT FOUND IN COMMON
 COMMERCIAL WALLS

FEATURES & BENEFITS

- This pinned version of the legendary DIAMOND PRO® block presents the option of 7° or Near Vertical installation. Additional system batter can be created by alternating pin placement on each course of wall.
- Build walls in excess of 50 feet when combined with geosynthetic reinforcement†
- ASTM C1372 – compliant
- 3 face styles in a single-sized block system
- Large cores for ease of handling and drainage aggregate placement during installation.
- Supported by Anchorwall® design software and estimating tools
- Compatible fittings/accessories

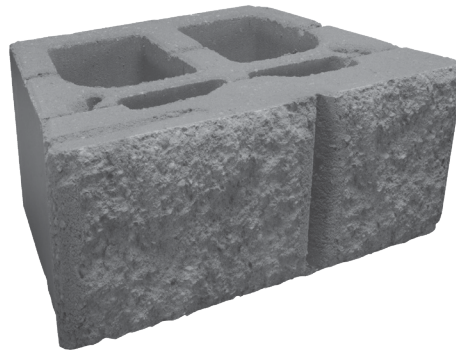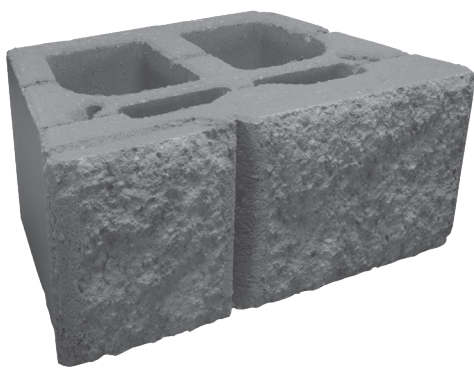

^{*}See Installation Guide. Reinforced walls, and other critical walls, must be designed by qualified engineers.

[†]Dimensions and Weights may differ by face style and by manufacturer.

[‡]Gravity wall heights are based on project specific conditions and may be less than this value.

[§]Measured on the top course to the front of the wall.

[¶]Measured on the base course to the front of the wall.

H X W X D*	8" X 18" X 12"
WEIGHT	75 LBS.
COVERAGE	1 SQ. FT.
SETBACK & BATTER	1" PER COURSE (7.1°) OR NEAR VERTICAL
MAX. GRAVITY WALL HT.†	4 FT.
MIN. OUTSIDE RADIUS‡	4 FT.
MIN. INSIDE RADIUS¶	6 FT.