




DEVELOPED BY
ANCHOR
DIAMOND
WALL INDUSTRY EXPERTS

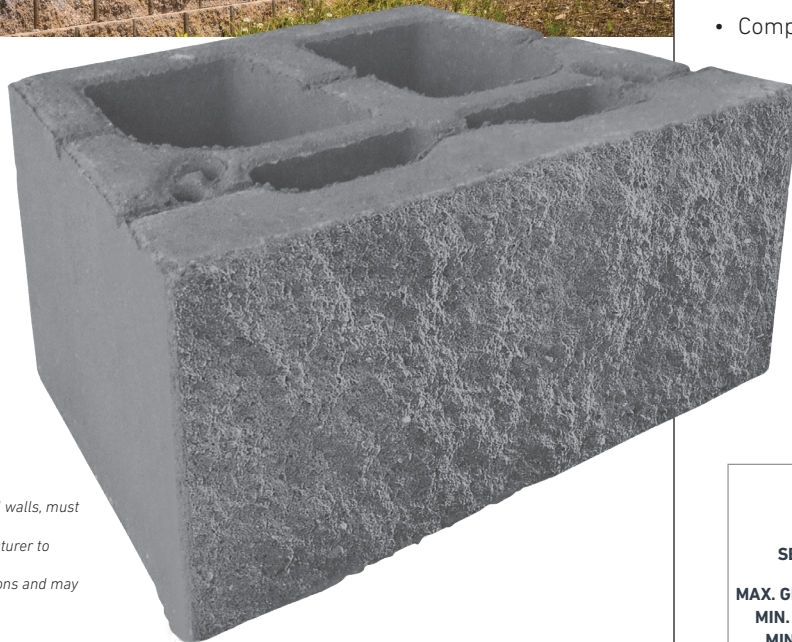

DIAMOND PRO PS

RETAINING WALL
STRAIGHT FACE

SPLIT-STONE TEXTURE AND CLEAN EDGES PROVIDE A COST EFFECTIVE CLASSIC LOOK FOR LARGE WALLS

✓ FEATURES & BENEFITS

- This pinned version of the legendary DIAMOND PRO® block presents the option of 7° or Near Vertical installation. Additional system batter can be created by alternating pin placement on each course of wall.
- Build walls in excess of 50 feet when combined with geosynthetic reinforcement†
- ASTM C1372 – compliant
- Large cores for ease of handling and drainage aggregate placement during installation.
- Supported by Anchorwall® design software and estimating tools
- Compatible fittings/accessories

[†]See Installation Guide. Reinforced walls, and other critical walls, must be designed by qualified engineers

[‡]Dimensions and Weights may differ slightly from manufacturer to manufacturer.

[§]Gravity wall heights are based on project specific conditions and may be lower than this value.

[¶]Measured on the top course to the front of the wall.

^{**}Measured on the base course to the front of the wall.

H X W X D*	8" X 18" X 12"
WEIGHT†	75 LBS.
COVERAGE	1 SQ. FT.
SETBACK & BATTER	1" PER COURSE; 7.1° OR NEAR VERTICAL
MAX. GRAVITY WALL HT.**	4 FT.
MIN. OUTSIDE RADIUS†	4 FT.
MIN. INSIDE RADIUS**	6 FT.



ANCHOR DIAMOND Group
5909 Baker Rd. Suite 550
Minnetonka, MN 55345
☎ 1-952-933-8855

For more info visit
anchordiamond.com

