



DEVELOPED BY  
**ANCHOR**  
DIAMOND  
WALL INDUSTRY EXPERTS





# DIAMOND PRO<sup>®</sup>

RETAINING WALL  
STONE CUT VIRTUAL  
JOINT FACE

A MULTI-PIECE TUMBLED  
STONE LOOK FOR LARGE  
SCALE PROJECTS IN SERVICE  
SINCE 1999.

## ✓ FEATURES & BENEFITS

- Walls in excess of 50 feet high have been built with the Diamond Pro system when combined with geosynthetic reinforcement.\*
- ASTM C1372 – compliant
- ICC evaluated
- Supported by Anchorwall<sup>®</sup> design software and estimating tools
- Large open cores for ease of handling and drainage aggregate placement during installation.
- Three face styles in a single-sized block system
- Compatible fittings/accessories

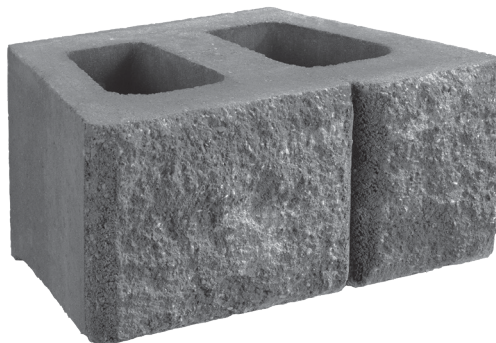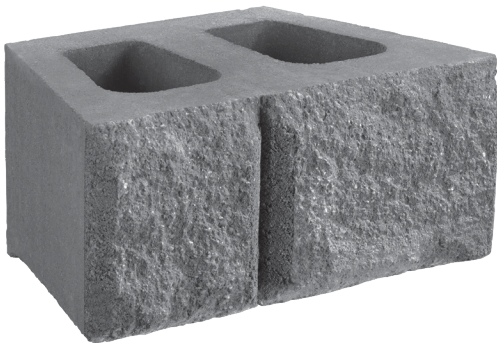

\* See Installation Guide. Reinforced walls, and other critical walls, must be designed by qualified engineers.

\*\*Dimensions and Weights may differ slightly from manufacturer to manufacturer.

‡The maximum gravity wall height is project specific and may be lower than this height.

†Measured on the top course to the front of the wall.

††Measured on the base course to the front of the wall.

<b>H X W X D**</b>	<b>8" X 18" X 12"</b>
<b>WEIGHT</b>	<b>77 LBS.</b>
<b>COVERAGE</b>	<b>1 SQ. FT.</b>
<b>SETBACK &amp; BATTER</b>	<b>1" PER COURSE; 7.1°</b>
<b>MAX. GRAVITY WALL HT.**</b>	<b>4 FT.</b>
<b>MIN. OUTSIDE RADIUS†</b>	<b>4 FT.</b>
<b>MIN. INSIDE RADIUS††</b>	<b>6 FT.</b>



**ANCHOR DIAMOND Group**  
5909 Baker Rd. Suite 550  
Minnetonka, MN 55345  
☎ 1-952-933-8855

For more info visit  
[anchordiamond.com](http://anchordiamond.com)

