




DEVELOPED BY
ANCHOR
DIAMOND
WALL INDUSTRY EXPERTS

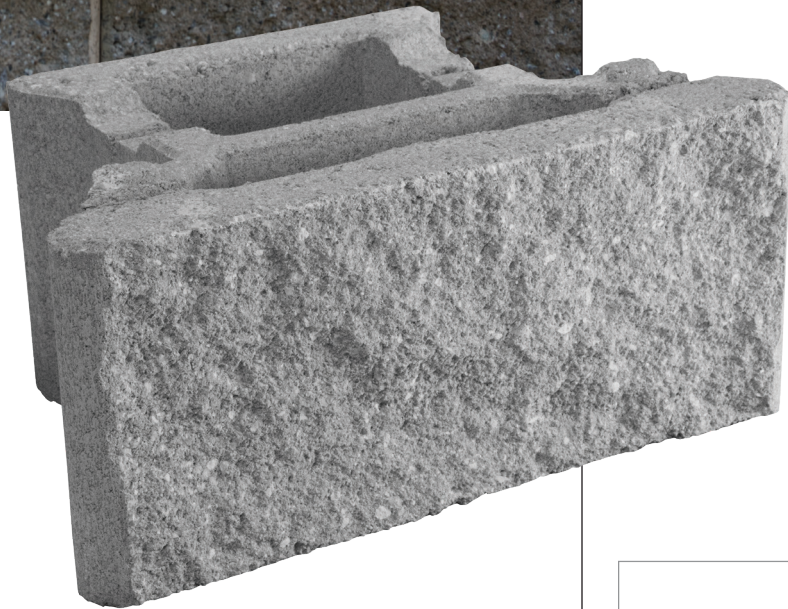

GEOHOLD[®]

RETAINING WALL STRAIGHT SPLIT FACE

AN ECONOMICAL SOLUTION TO
MAXIMIZE INSTALLATION AND
SHIPPING EFFICIENCIES

✔ FEATURES & BENEFITS

- ASTM C1372 – compliant
- Weighing only 54 lbs. this 1 square foot block maximizes installation and shipping efficiencies
- Large thru-cores align vertically from course to course for easy filling and can accommodate light fencing when combined with additional engineered elements
- Top course of wall can be installed upside-down for easy capping
- Supported by Anchorwall[®] design software and estimating tools
- Compatible fittings/accessories

^{*}See Installation Guide.

^{*}Reinforced walls, and other critical walls, must be designed by qualified engineers.

^{*}Dimensions and Weights may differ slightly from manufacturer to manufacturer.

^{*}Gravity wall heights are based on project specific conditions and may be lower than this value.

^{*}Measured on the top course to the front of the wall.

^{**}Measured on the base course to the front of the wall.

H X W X D[*]	8" X 18" X 11.5"
WEIGHT[*]	54 LBS.
COVERAGE	1 SQ. FT.
SETBACK (PER COURSE); BATTER	0.675"; 4°
MAX. GRAVITY WALL HT.[*]	3' 4"
MIN. OUTSIDE RADIUS[*]	4 FT.
MIN. INSIDE RADIUS^{**}	6 FT.



ANCHOR DIAMOND Group
5909 Baker Rd. Suite 550
Minnetonka, MN 55345
☎ 1-952-933-8855

For more info visit
anchordiamond.com



©2023 ANCHOR DIAMOND Group. All rights reserved.
AD23-001-GEOHOLD