


PRODUCT INFORMATION



Architects and engineers choose the Diamond Pro[®] retaining wall system to create flexible, cost-effective solutions for a broad range of large commercial, municipal and residential retaining wall projects. Contractors choose the Diamond Pro wall system for its time-tested strength and rear-lip locator, which easily establishes a uniform wall batter.

- Rear lip locator
- Matching cap and corner unit complete the system
- Large cores for ease in handling
- Gravity walls can be built up to 4 feet high including buried course, but excluding the cap* with 7.1° batter
- Walls in excess of 50 feet have been built with Diamond Pro when combined with geosynthetic reinforcement

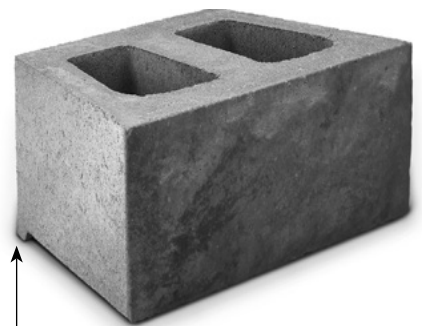

Rear Lip

**This height assumes cores are filled with drainage aggregate, level backfill and clean, compacted sand or gravel and no surcharge*

Diamond Pro[®] Quarried Face

RETAINING WALL SYSTEM

PRODUCT INFORMATION




SYSTEM PERFORMANCE:


- One square foot of wall face per block
- Minimum outside radius, measured on the top course to the front of the units: 4 feet
- Minimum inside radius, measured on the base course to the front of the units: 6 feet



Wall Unit



Cap Unit



Corner Unit

Units	Wall Unit	Cap Unit	Corner Unit
Approximate Dimensions	8" x 18" x 12"	4" x 18/12" x 12"	8" x 18" x 8"
Approximate Weight	69 lbs.	57 lbs.	80 lbs.
Coverage	1 sq. ft.	1.22 ln. ft.	1 sq. ft. (front) / .5 sq. ft. (end)
Setback/System Batter	1"/7.1°	N/A	N/A

© 2019 Anchor Wall Systems. The logos, slogans, product names and other trademarks shown in this document are trademarks of Anchor Wall Systems (AWS). The wall system components shown and described are designed by AWS and are made and sold by independent manufacturers under license from AWS.

Anchor Wall Systems, 5909 Baker Road, Suite 550, Minnetonka, MN 55345

AWS19-270 04/19