

PRODUCT INFORMATION



Create definition between the yard and garden with the ChiselEdge[™] edger, a complementary landscaping component to the classic ChiselWall[®] wall system.


Three unique face patterns produced with Anchor's patented Sculpsit[®] block-molding technology give the ChiselEdge[™] edger its distinctive look, evocative of Old World mason-cut blocks. Ideal for outlining patios, walkways and garden beds, the edgers feature a smooth back side for easy leveling and installation.

- Uniquely shaped for installation ease in both straight and curved applications
- A distinctive, sculpted face style that provides superior aesthetics
- Created to keep soil and mulch in place while providing a root barrier to unwanted garden grass and weeds
- The perfect addition to the ChiselWall[®] wall system, allowing homeowners to install a simple yet beautiful and harmonious look in their yard

PRODUCT INFORMATION

Edger Unit

Dimensions: 3.5" x 10.5" x 3.43"
 Weight: 7.8 lbs.
 Coverage: 0.85 linear feet
 Minimum Radius: 30" (2'6")
 Face Patterns: 3

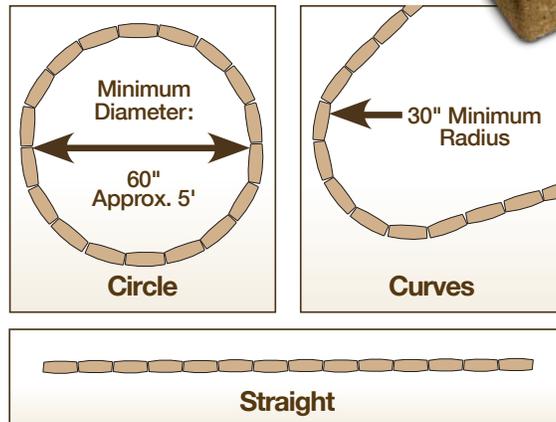

How to Install Edgers

- Step 1 Lay out the project by using stakes with a string line or garden hose. Dig a trench 6 inches wide and 4 inches deep.
- Step 2 Firmly compact the soil in the bottom of the trench with a tamper. Place 1 inch of paver base in the bottom of the trench and firmly compact.
- Step 3 Position edger units end to end in the trench. Using a rubber mallet, tamp the edgers firmly into place. Use a carpenter's level to ensure edger units are uniformly level. Continue to place the units until the desired length of the project is finished.
- Step 4 If necessary, edger units may be cut by using a circular saw with a masonry blade or split with a hammer and chisel. Read and understand the operating manual before using a saw. Finish project by firmly packing soil along sides of edger units and replace sod or mulch.

