



THIS AREA MUST BE BACKFILLED WITH SELECT FILL, COMPACTED TO 100 PERCENT OF THE STANDARD PROCTOR MAXIMUM DRY DENSITY.

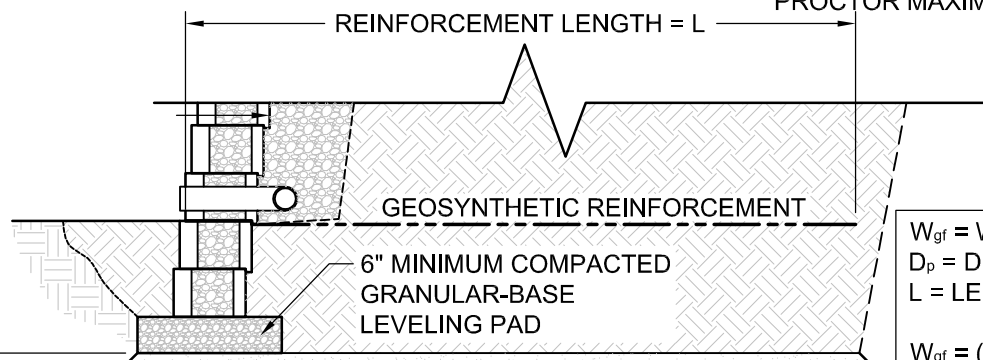

W_{gf} = WIDTH OF GRANULAR FILL
 D_p = DEPTH OF PIPE
 L = LENGTH OF GEOSYNTHETIC REINFORCEMENT
 $W_{gf} = (2 * D_p) + L + 6"$

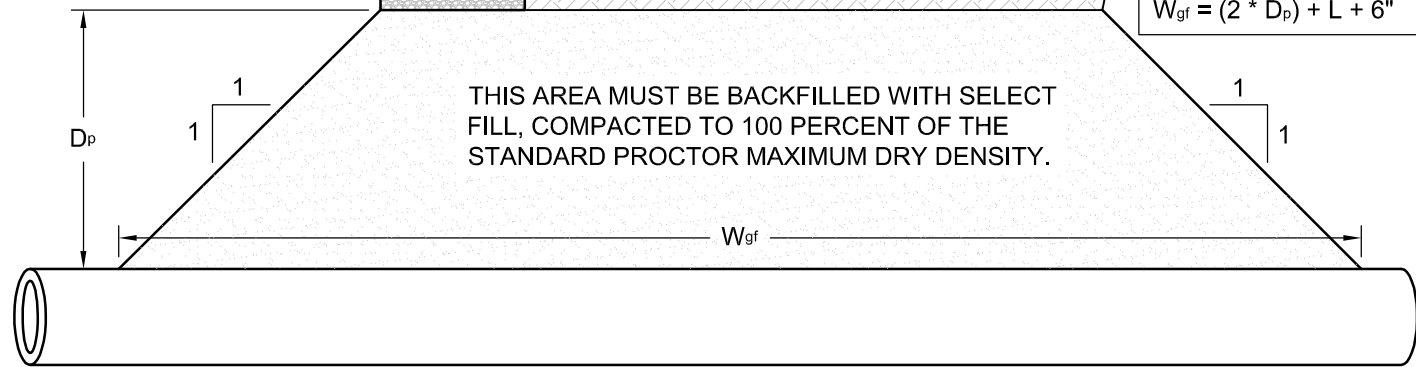

© 2015 Anchor Wall Engineering, LLC
 © and ™ Anchor Wall Systems, Inc.
 www.anchorwall.com

This drawing is for illustrative purposes only and should not be used for construction without the signature of a registered professional engineer.

Diamond Pro® Beveled Face Retaining Wall System

Typical Details for Utilities Below Wall

Scale: 3/8" = 1'-0"	Drawn by: SB
Date: 1/19/2016	Drawing number: DPBV22